




Num: Eldon_0708_012

Power Distribution Unit with Amp. Meter, HPDS-A

Power consumption

Market research shows us the need for even more spacious server racks, which means the dimensions of standard racks continues to grow. Although this makes it possible to add an unlimited number of power consuming components, you also run the risk of generating excessive amounts of heat inside the enclosure. In order to make you aware of potential (heat) risks, Eldon has now released a PDU with integrated digital Ampere meter.

The standard version comes complete with 19" assembly brackets, and is available with either Schuko, IEC or UTE sockets. Other socket types/lengths are available on request.

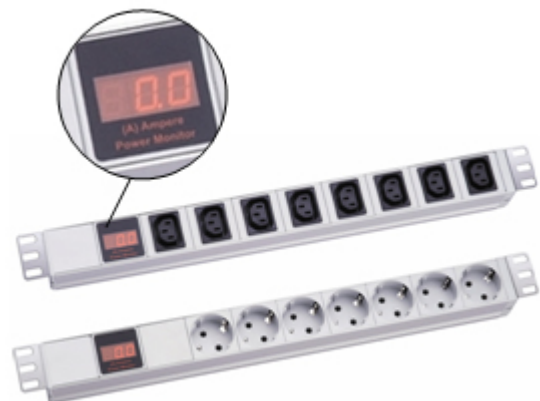

Description: PDU with digital Ampere meter showing the consumed current. Including 2,0 m cable with right angle plug and 19" assembly brackets and fixing kit. The 19" assembly brackets can be turned in steps of 90°. Outlets 35° turned. Nickel plated earth contacts. Standard available outlets: Schuko, IEC and UTE. Outlets on request: UK, USA, CH.

Material: Aluminum extrusion, anodized. Outlets polyamide 6.6 RAL7035.

Cable with angle plug: 2,0mtr x 1,5 mm²

Rated power: PDU: 16A/3600W Amp. Meter: Range from 0-16 Amp. Max. current 20 Amp. Accuracy: class 2,5

Earthing: Double earthing

Delivery: 1 complete PDU with power cable and fixing brackets

Outlets	Max. Current	Part.nr.
IEC 8x 250V	16A	HPDI 19008A
Schuko 7x 250V	16A	HPDS119007A
UTE 7x 250V	16A	HPDU119007A

For more information contact your local Eldon Distributor or go to www.eldon.com