



EDFV 800 wide with 19" perforation

Num: Eldon_200710_15

Full vented doors 800 wide now with 19" wide perforation


19 Inch wide perforation

Next to the 600 wide EDFV ventilation doors, which were already equipped with a 19-Inch wide perforation, Eldon will now also change the 800 wide versions. Both widths will be offered with a 19-Inch wide 80, 3% punching for maximum cross-flow, guiding the cold air directly to the servers.


The left and right hand side of the door (next to the punching) now covers the sides next to the 19-Inch profiles in the (server) rack, which gives a much more appealing appearance to the rack. This is because the sides are now covering any patch or power cables, which might be in plain site.

The change will be effective as of the 29th of October 2007.
All 800 wide EDFV doors with the new perforation width will be marked with: "New 19-Inch perforation width"

Different situations:

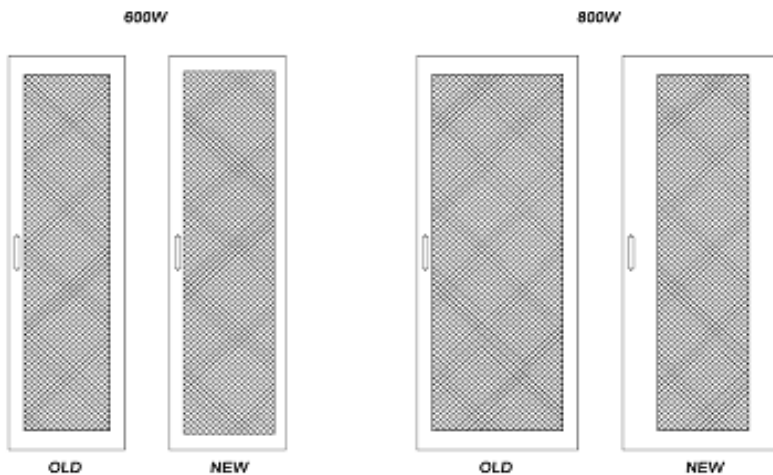

EDFV. Flush full vented door (80,3%) with swing handle

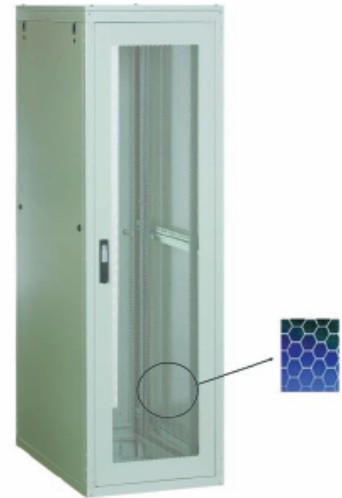

Description: Flush left or right, 130 degree hinged, fully vented door with 80,3% ventilation for optimum "cross-flow" cooling of the servers inside the rack. To be used in combination with the EDFV full vented rear panels. Optional inserts can be fitted from the LSSI programme.
Material: 1.25 mm steel plate.
Finish: Structure powder paint light grey, RAL 7035.
Pack. quantity: 1 door with swing handle (key no. 333) and hinges.

W	Height	h	w	W/D	Colour	Part No.
360	21	754	404	600	RAL7035	EDFV1006
	43	1754	404	600		EDFV2006
560	43	1754	404	800		EDFV2008
360	48	1954	404	600		EDFV2206
560	48	1954	404	800		EDFV2208
360	21	754	404	600	RAL9011	EDFV10061
	43	1754	404	600		EDFV20061
560	43	1754	404	800		EDFV20061
360	48	1954	404	600		EDFV22061
560	48	1954	404	800		EDFV22061

For more information contact your local Eldon Distributor or go to www.eldon.com

Wieger W. Westra
Senior Product Manager
Eldon Group
Email: wieger.westra@eldon.com